

## Welcome Guide



PN-W05  
Qi Solar Power Bank

### Important safety instructions

Warning: When using this product, basic precautions should always be followed, including the following:

- Carefully read the User Manual before using the power bank.
- Close supervision is needed when the power bank is used near children.
- Do not strike, hit or insert any foreign objects into the power bank or any of its ports.
- Do not expose the power bank to heavy rain/snow to avoid malfunction.
- Do not immerge the power bank into water to avoid malfunction.
- Do not disassemble or reassemble the power bank without authorization from manufacturer
- Do not use the power bank if it has been damaged or modified. If you see any bulging, swelling, leakage or other abnormality from the power bank, stop using it immediately.

### Legal and Regulatory Compliance

All BLAVOR power banks have undergone extensive tests and the strict quality control procedure. Both our factory and products are tested and certified.

- ISO 9001: Quality management system demonstrates our ability to consistently provide products and services that meet customer and applicable statutory and regulatory requirements.
- UN38.3 Test Certificate: ensures that the battery cell used in the charger adheres to standards like maximum continuous charge voltage, cut off voltage, nominal voltage, discharge etc.
- UL 2056 Test Certificate: A safety standards proves that the products have gone through a series of in-depth evaluations by UL expert engineers.

### PRODUCT PARAMETERS

Product Name	Wireless Solar Power Bank
Micro USB Input	DC 5V 2.1A
USB-C Input	DC 5V 2.1A
USB Output	DC 5V 2.1A
Qi Wireless Output	DC 5V 1.0A
Battery Capacity	10,000 mAh
Battery Type	Polymer Lithium Battery
Qi Compatible Devices	All Qi Enabled Devices
Water Resistance	IPX4 (splash proof)

Product Size	5.9 x 3.1 x 0.8 inches
Product Weight	9.6oz

### PACKAGE CONTENTS

- 1 -Solar Power Bank 1- User Manual  
1 -11.8in USB-C Cable 1- Compass Carabiner

### Product Details



### ① Wireless charging indicator

Briefly press the power button to begin wireless charging. The green light indicates a ready state for charging. If no Qi-enabled devices are close to the Qi pad within 20 seconds, it will turn off.

### ② Power button

Briefly press the power button to check battery levels or to enable the Qi pad for wireless charging. Press and hold the power button for 3-5 seconds to turn on/off the LED flashlight.

### ③ Qi pad (wireless charging area)

Place Qi-enabled devices in this area for wireless charging.

### ④ Anti-slip rubber mat

This rubber circle helps prevent devices from sliding off the charging pad.

### ⑤ Dual LED flashlight

Press and hold the power button for 3-5 seconds to turn on/off.

### ⑥ USB-C Input (5V 2.1A)

Use this port to charge the power bank with a USB-C cable (included).

### ⑦ USB Output (5V 2.1A)

Use this port for charging devices via cable

### ⑧ Micro-USB Input (5V 2.1A)

Use this port to charge the power bank with a micro-USB cable (not included).

### ⑨ Solar charging indicator

This green light indicates if solar charging is occurring. Maximum charging occurs with light intensity of at least 25,000 lux and full panel exposure to light.

### ⑩ Battery power indicator

These blue lights indicate battery level and cabled charging. Each light is 25% battery level (so two lights would be 50% battery, three lights is 75% and four lights is 100% battery level). When charging the power bank, these flash in sequence until fully charged.

### ⑪ Solar panel


This works best under full sunlight (25,000 lux or higher). With optimal light conditions, the charge current is 180mA.

### QUICKSTART GUIDE

NOTE: It is advised to use the solar charging feature as an emergency backup solution instead of the main power source, due to variable sunlight intensity and panel conversion rates.

Make sure that your power bank is fully charged using a power outlet before starting a long trip.

### Using Your Power Bank As a Charge

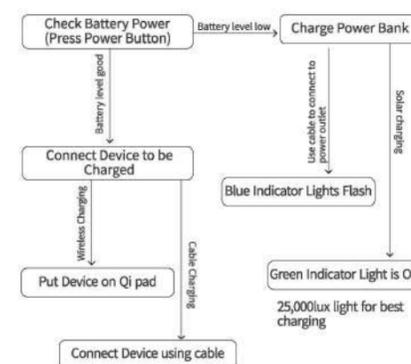

### PRODUCT MAINTENANCE

- If you are not using the device for a long time, charge it using a power outlet at least every six months.

### IMPORTANT NOTICES

- Do not use the wireless charging function while charging the power bank.
- The power bank is designed for 5V/2A power adapters when wall charging.
- Keep the power bank away from wet environments and corrosive substances.
- Do not try to refit, retrofit or disassemble the power bank.

### QUALITY WARRANTY

All products sold by BLAVOR enjoy a 12 month warranty. The guarantee period begins from the date of purchase.

During the warranty period, if there are problems caused by manufacturer defect (as verified by our engineering team), BLAVOR will be responsible for it and our team will be with you until you are satisfied.

### CUSTOMER SERVICE

BLAVOR offers timely and considerate customer service. If you have questions or concerns, feel free to contact us and we will get back to you within 12 hours.

We love to get feedback so we can improve our products and customer service!

Thank you for choosing BLAVOR!

CONTACT US  
support@blavor.com